

Delo® Protection for Surface Mining Equipment



Hydraulic System

Delo® 400 MGX SAE 15W-40
Delo® Gold Ultra SAE 15W-40
Delo® TorqForce SAE 10W




Engine Crankcase

Delo® XLD Multigrade SAE 10W-40
Delo® 400 MGX SAE 15W-40
Delo® Gold Ultra SAE 15W-40
Delo® FleetPRO™ SAE 15W-40



Coolant System

Delo® XLC Antifreeze/Coolant - Premixed 50/50
Delo® XLI Corrosion Inhibitor - Premixed

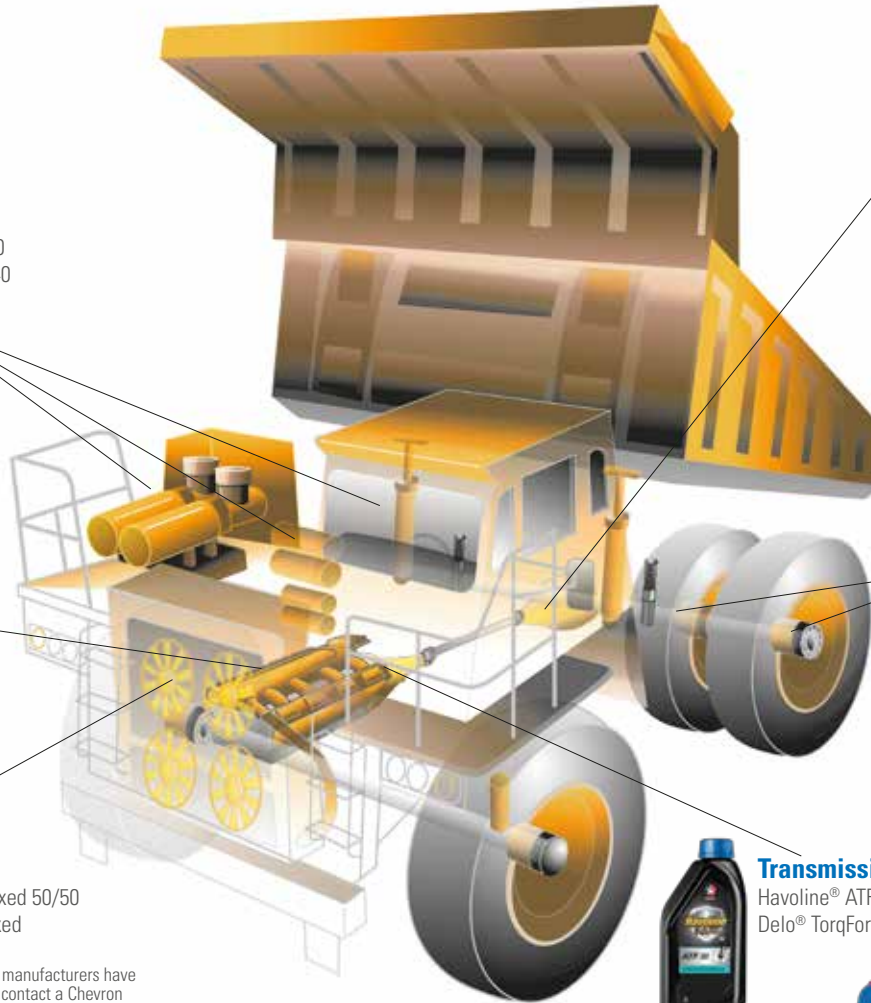

Differentials & Gear Drives

Delo® TorqForce SAE 30, 50
Delo® Syn-Gear XDM SAE 75W-90
Delo® Gear ESI SAE 80W-90
Gear Oil GL-5 SAE 80W-90, SAE 85W-140



Bearings and Grease

Delo® Grease ESI® 2
Delo® Grease EP
Delo® Starplex® EP
Molytex® EP
Multifak® EP



Transmission

Havoline® ATF III (Automatic)
Delo® TorqForce SAE 10W, 30



The product recommendations provide general guidelines for use in mining equipment. All manufacturers have different coolant and lubricant requirements and recommendations. It will be important to contact a Chevron representative or refer to the Original Equipment Manufacturer manual to confirm the proper product is used for the application. You may contact our LUBETEK organization for confirmation of specific equipment OEM specifications.

Delo®
Let's go further.®

A Chevron company product

© 2016 Chevron Alkhalij. All rights reserved. All trademarks are the property of Chevron Intellectual Property LLC.